



Pika-Pika


**NAKAMOTO
FORESTRY**
EUROPE

SPECIFICATIONS

Pika-Pika – charred and brushed twice

Wire-brushed textured surface with striped pattern. Suitable for interior and exterior applications

MATERIAL PROPERTIES:

Species:	Japanese cypress (<i>Cryptomeria japonica</i>)
Origin:	Origin: Japan, PEFC-/SGEC-certified
Hardness:	Very soft – 320 - 510 (Janka)
Weight:	Light – 360 - 380 kg/m ³
Specific gravity:	0,33 - 0,36 R ₁₂
Moisture content:	11-14%
Durability:	Durable - decay resistance class 2
Use class rating (EN-335):	Exterior, above ground, exposed to weather – Use Class 3
Fire resistance (EN-13501):	D-s2, d0 (general rating, BS class 3), B-s1, d0 (special treated, BS class 0)


INSTALLATION DETAILS:

Overage:	Please add a healthy overage ranging 10-20% to your order as shipping additional material can be very expensive. When calculating the area of cladding required please pay attention to the covering width of the lining.
Furring:	Generally applied to ventilated curtain walls or rain-screens. It should be ensured that the cladding can dry and waterlogging is avoided.
Fasteners:	Stainless steel ring/screw-shank headed nails or wood screws (exterior), pin nails (interior).
Installation layout:	Vertical, horizontal, or diagonal layout possible, open or closed screen.
Pre-finishes:	Our pre-finishes are coated on the cladding surface. Coating of the edges or backs on demand.

AVAILABLE PROFILES AND DIMENSIONS:

STANDARD SHIPLAP DIMENSIONS


145 mm width, 3970 mm length

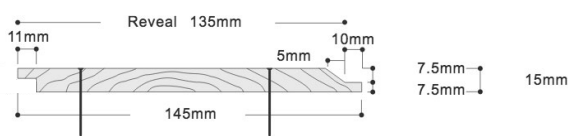

STANDARD SQUARE EDGE DIMENSIONS


145 mm width, 3970 mm length

(on request also available in 89 mm width)



STANDARD SQUARE EDGE DIMENSIONS

195 mm width, 3970 mm length




AVAILABLE STANDARD COLOURS:



#102 transparent (Int/Ext)




#111 silver grey (Int/Ext)



#121 light oak (Int/Ext)



#132 ebony (Int/Ext)



#152 medium grey (Int/Ext)



#201 transparent (Int/Ext)



#811 silver grey (Int/Ext)

More colours
available
on request

PRODUCT DOES NOT SHED SOOT AFTER INSTALLATION

