



Suyaki

SPECIFICATIONS



Suyaki - original charred

Heavily charred with magnificent charcoal black color – no brushing

Exterior: Delicate surface with maximum longevity | Interior: Eye-catching surface with distinct texture




MATERIAL PROPERTIES:

Species:	Japanese cypress (<i>Cryptomeria japonica</i>)
Origin:	Origin: Japan, PEFC-/SGEC-certified
Hardness:	Very soft – 320 - 510 (Janka)
Weight:	Light – 360 - 380 kg/m ³
Specific gravity:	0,33 - 0,36 R ₁₂
Moisture content:	11-14%
Durability:	Durable - decay resistance class 2
Class rating (EN-355):	Exterior, above ground, exposed to weather – Use Class 3
Fire resistance (EN-13501):	D-s2, d0 (general rating, BS class 3), B-s1, d0 (special treated, BS class 0)

INSTALLATION DETAILS:

Overage:	Please add a healthy overage ranging 10-20% to your order as shipping additional material can be very expensive
Furring:	Generally applied to ventilated curtain walls or rainscreens. It should be ensured that the cladding can dry and waterlogging is avoided
Fasteners:	Stainless steel ring/screw-shank headed nails or wood screws (exterior), pin nails (interior)
Installation layout:	Vertical, horizontal, or diagonal layout possible, open or closed screen

AVAILABLE PROFILES AND DIMENSIONS:

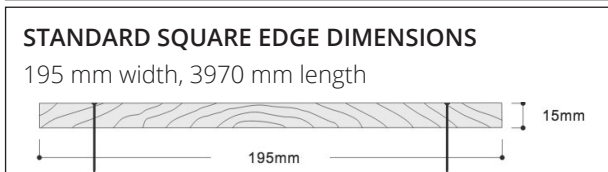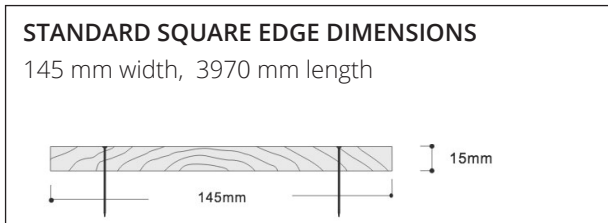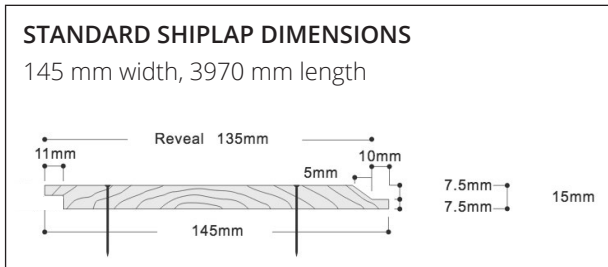

AVAILABLE STANDARD COLOURS:



#202 transparent (Ext)



#232 ebony (Ext)



#302 transparent (Int)



#532 ebony (Ext)



#602 transparent (Int)

More colours available on request

PRODUCT DOES NOT SHED SOOT AFTER INSTALLATION

