



# Suyaki

## SPECIFICATIONS



### Suyaki – original charred

Heavily charred with magnificent charcoal black color – no brushing

Exterior: Delicate surface with maximum longevity | Interior: Eye-catching surface with distinct texture




#### MATERIAL PROPERTIES:

<b>Species:</b>	Japanese cypress ( <i>Cryptomeria japonica</i> )
<b>Origin:</b>	Origin: Japan, PEFC-/SGEC-certified
<b>Hardness:</b>	Very soft – 320 - 510 (Janka)
<b>Weight:</b>	Light – 360 - 380 kg/m <sup>3</sup>
<b>Specific gravity:</b>	0,33 - 0,36 R <sub>12</sub>
<b>Moisture content:</b>	11-14%
<b>Durability:</b>	Durable - decay resistance class 2
<b>Use class rating (EN-335):</b>	Exterior, above ground, exposed to weather – Use Class 3
<b>Fire resistance (EN-13501):</b>	D-s2, d0 (general rating, BS class 3), B-s1, d0 (special treated, BS class 0)

#### INSTALLATION DETAILS:

<b>Overage:</b>	Please add a healthy overage ranging 10-20% to your order as shipping additional material can be very expensive. When calculating the area of cladding required please pay attention to the covering width of the lining.
<b>Furring:</b>	Generally applied to ventilated curtain walls or rain-screens. It should be ensured that the cladding can dry and waterlogging is avoided.
<b>Fasteners:</b>	Stainless steel ring/screw-shank headed nails or wood screws (exterior), pin nails (interior).
<b>Installation layout:</b>	Vertical, horizontal, or diagonal layout possible, open or closed screen.
<b>Pre-finishes:</b>	Our pre-finishes are coated on the cladding surface. Coating of the edges or backs on demand.

#### AVAILABLE PROFILES AND DIMENSIONS:

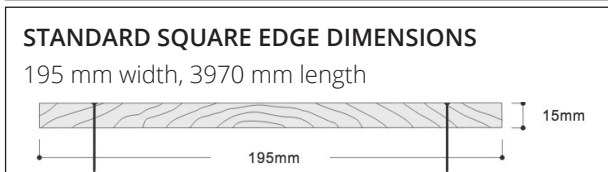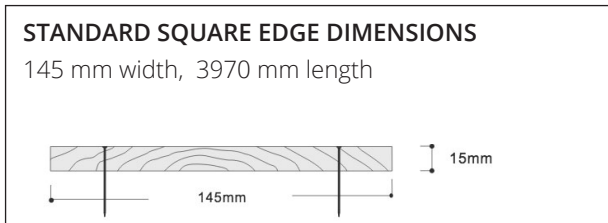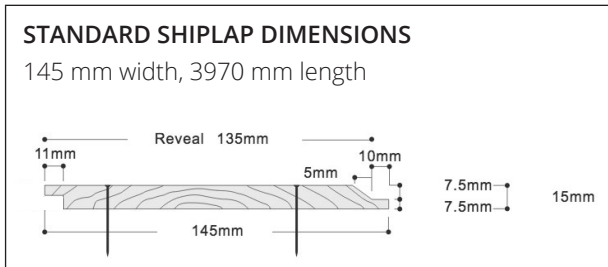

#### AVAILABLE STANDARD COLOURS:



#702 transparent (Ext)



#732 ebony (Ext)



#902 transparent (Int)

More options available on request

PRODUCT DOES NOT SHED SOOT AFTER INSTALLATION

